

## Kenmerken



- Decorative air curtain in contemporary architectural style. Its minimalist and smart design integrates in any environment and offers infinite options to customize.
- The panels can include logos, lighting, signage, safety or information signs, graphics, pictures, clocks, all according to customer specifications.
- Front anodized aluminium panels. Optionally manufactured in brushed or mirror polished stainless steel. Other materials are possible, such as galvanized steel, smooth or textured skinplate, wood, etc.
- Central structure made of galvanized steel finished in black forge as standard. Other colours are available on request.
- Anodized aluminium outlet vanes, airfoil shaped, adjustable in both directions.
- EC Double-inlet centrifugal fans driven by an external rotor motor and low noise level, with very low consumption efficiency fans.
- "P" type with water heated coil. "E" type with electrical shielded elements, three stages with integrated regulation. "A" type without heating, air only. Optional expansion DX coil.
- Includes Clever control (programmable, automatic, intelligent, energy saving, Modbus RTU for BMS...)

## Specificaties

50Hz

onverwarmd		
Model	nominale luchtstroom (m <sup>3</sup> /h)	geadviseerde installatiehoogte (m)
ZEN BB 1000 A	4020	5-7
ZEN BB 1500 A	5360	5-7
ZEN BB 2000 A	8040	5-7
ZEN BB 2500 A	9380	5-7

elektrische verwarming			
Model	nominale luchtstroom (m <sup>3</sup> /h)	elektrische warmte capaciteit 400Vx1 (kW)	geadviseerde installatiehoogte (m)
ZEN BB 1000 E	4020	6/15/21	5-7
ZEN BB 1500 E	5360	8/19/27	5-7
ZEN BB 2000 E	8040	12/30/42	5-7
ZEN BB 2500 E	9380	16/30/46	5-7

water opwarmen					
Model	nominale luchtstroom (m <sup>3</sup> /h)	Verwarmingscapaciteit 80/60°C (kW)	Verwarmingscapaciteit 60/40°C (kW)	verwarmingscapaciteit 50/40°C (kW)	geadviseerde installatiehoogte (m)
ZEN BB 1000 P86	3750	18,21	-	-	5-7
ZEN BB 1500 P86	5000	26,46	-	-	5-7
ZEN BB 2000 P86	7500	38,44	-	-	5-7
ZEN BB 2500 P86	8750	46,38	-	-	5-7
ZEN BB 1000 P64	3750	-	15,16	-	5-7
ZEN BB 1500 P64	5000	-	21,87	-	5-7
ZEN BB 2000 P64	7500	-	31,13	-	5-7
ZEN BB 2500 P64	8750	-	38,96	-	5-7
ZEN BB 1000 P54	3750	-	-	16,48	5-7
ZEN BB 1500 P54	5000	-	-	24,15	5-7
ZEN BB 2000 P54	7500	-	-	35,04	5-7
ZEN BB 2500 P54	8750	-	-	42,12	5-7

60Hz





onverwarmd		
Model	nominale luchtstroom (m <sup>3</sup> /h)	geadviseerde installatiehoogte (m)
ZEN BB 1000 A	4020	5-7
ZEN BB 1500 A	5360	5-7
ZEN BB 2000 A	8040	5-7
ZEN BB 2500 A	9380	5-7

elektrische verwarming			
Model	nominale luchtstroom (m <sup>3</sup> /h)	elektrische warmte capaciteit 400Vx1 (kW)	geadviseerde installatiehoogte (m)
ZEN BB 1000 E	4020	6/15/21	5-7
ZEN BB 1500 E	5360	8/19/27	5-7
ZEN BB 2000 E	8040	12/30/42	5-7
ZEN BB 2500 E	9380	16/30/46	5-7

water opwarmen					
Model	nominale luchtstroom (m <sup>3</sup> /h)	Verwarmingscapaciteit 80/60°C (kW)	Verwarmingscapaciteit 60/40°C (kW)	verwarmingscapaciteit 50/40°C (kW)	geadviseerde installatiehoogte (m)
ZEN BB 1000 P86	3750	18,21	-	-	5-7
ZEN BB 1500 P86	5000	26,46	-	-	5-7
ZEN BB 2000 P86	7500	38,44	-	-	5-7
ZEN BB 2500 P86	8750	46,38	-	-	5-7
ZEN BB 1000 P64	3750	-	15,16	-	5-7
ZEN BB 1500 P64	5000	-	21,87	-	5-7
ZEN BB 2000 P64	7500	-	31,13	-	5-7
ZEN BB 2500 P64	8750	-	38,96	-	5-7
ZEN BB 1000 P54	3750	-	-	16,48	5-7
ZEN BB 1500 P54	5000	-	-	24,15	5-7
ZEN BB 2000 P54	7500	-	-	35,04	5-7
ZEN BB 2500 P54	8750	-	-	42,12	5-7

Afmetingen

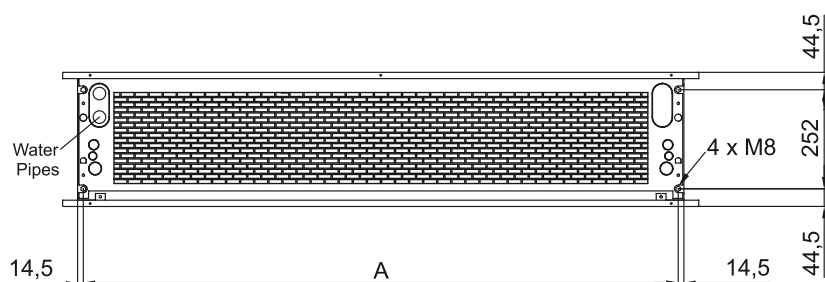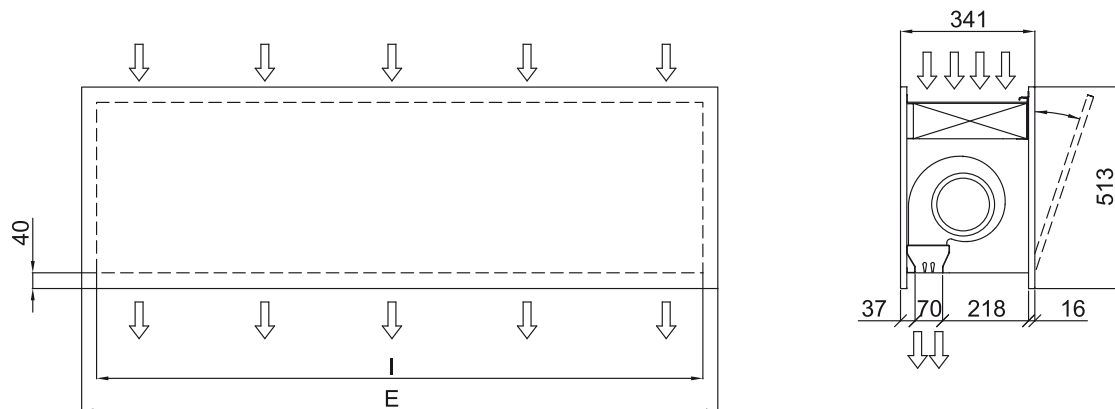

	L	I	A
Zen BB 1000	1220	1140	1115
Zen BB 1500	1620	1544	1515
Zen BB 2000	2120	2044	2015
Zen BB 2500	2620	2544	2515