
Kenmerken

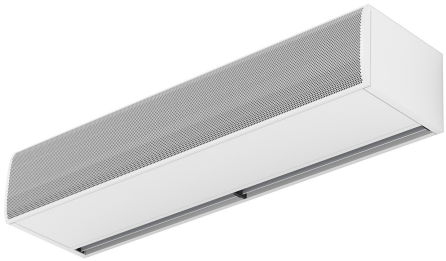

- Speciaal ontworpen om te worden geïnstalleerd in deuren van koelcellen en diepvriezers.
- Zelfdragende behuizingconstructie van gegalvaniseerde staalplaat, standaard afgewerkt in structurele epoxy-polyesterlak witte kleur RAL9016.Andere kleuren of roestvrij staal zijn op aanvraag verkrijgbaar.
- Groot gefacetteerd inlaatrooster dat intensief onderhoud vermijdt.Ook verkrijgbaar met vlakke microgeperforeerde inlaatgrille, eleganter voor commerciële deuren waar geen verwarming nodig is.
- Uitlaten van geanodiseerd aluminium, aerodynamisch gevormdinstelbaar van 0 tot 15º aan elke kant.
- EC Double-inlet centrifugal fans driven by an external rotor motor and low noise level, with very low consumption efficency fans.
- "A" type zonder verwarming, alleen lucht.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 10m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Specificaties

50Hz


Model	onverwarmd	
	nominale luchtstroom (m³/h)	geadviseerde installatiehoogte (m)
KBB 1000 A	4020	5-7
KBB 1500 A	5360	5-7
KBB 2000 A	8040	5-7
KBB 2500 A	9380	5-7
KBB 3000 A	10720	5-7
KSB 1000 A	3060	3,5-5
KSB 1500 A	4080	3,5-5
KSB 2000 A	6120	3,5-5
KSB 2500 A	7140	3,5-5
KSB 3000 A	8160	3,5-5


60Hz

Model	onverwarmd	
	nominale luchtstroom (m³/h)	geadviseerde installatiehoogte (m)
KSB 1000 A	3060	3,5-5
KSB 1500 A	4080	3,5-5
KSB 2000 A	6120	3,5-5
KSB 2500 A	7140	3,5-5
KSB 3000 A	8160	3,5-5

Afmetingen


View from the top / *Vista superior*

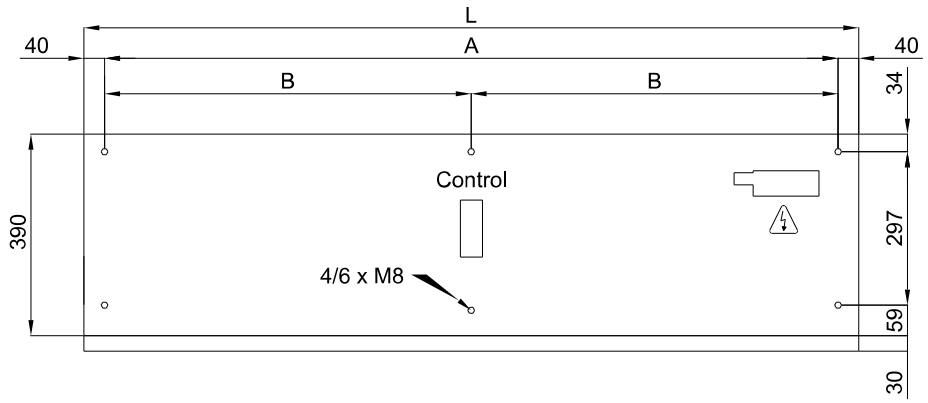



Lateral View / *Vista Lateral*

View from the bottom / *Vista inferior*

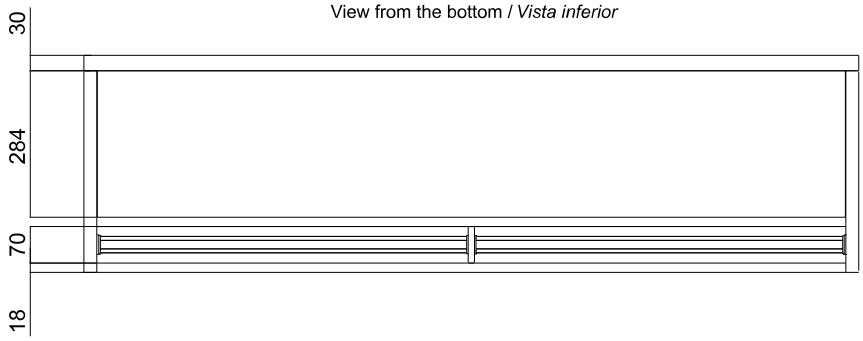

L	A	B
1000	920	-
1500	1420	710
2000	1920	960
2500	2420	1210
3000	2920	1460