Kenmerken



- Zelfdragende behuizingconstructie van gegalvaniseerde staalplaat, klaar om te worden geïnstalleerd verzonken in een vals plafond.
- Inlaatrooster (onderhoudsvrij) gemaakt van aluminium profielen en uitblaasmondstuk, geïntegreerd in een enkele witte framekleur RAL 9016.Andere kleuren zijn op aanvraag verkrijgbaar.
- Uitlaten van geanodiseerd aluminium, aerodynamisch gevormd, instelbaar in beide richtingen.
- EC Double-inlet centrifugal fans driven by an external rotor motor and low noise level, with very low consumption efficency fans.
- Type "P" met waterverwarmde spoel."E" type met elektrische afgeschermde elementen, drie trappen met geïntegreerde regeling."A" type zonder verwarming, alleen lucht.Optionele expansie DX-spoel.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m RJ11 cable and remote control. Optional: intelligent Clever Pro Control (automatic, programmable, ModBus for PKC, timer, etc.)

Specificaties

50Hz

	onverwarmd	
Model	**nominale luchtstroom** (m³/h)	**geadviseerde installatiehoogte** (m)
RBB 1000 A	4020	4-7
RBB 1500 A	5360	4-7
RBB 2000 A	8040	4-7
RBB 2500 A	9380	4-7
RSB 1000 A	3060	3,5-5
RSB 1500 A	4080	3,5-5
RSB 2000 A	6120	3,5-5
RSB 2500 A	7140	3,5-5

	elektrische verwarming		
Model	**nominale luchtstroom** (m³/h)	**elektrische warmte capaciteit 400Vx1** (kW)	**geadviseerde installatiehoogte** (m)
RBB 1000 E	4020	6/15/21	4-7
RBB 1500 E	5360	8/19/27	4-7
RBB 2000 E	8040	12/30/42	4-7
RBB 2500 E	9380	16/30/46	4-7
RSB 1000 E	3060	5/10/15	3,5-5
RSB 1500 E	4080	7,5/15/22,5	3,5-5
RSB 2000 E	6120	10/20/30	3,5-5
RSB 2500 E	7140	12/22/34	3,5-5

	water opwarmen				
Model	**nominale luchtstroom** (m³/h)	**geadviseerde installatiehoogte** (m)	**Verwarmingscapaciteit 80/60ºC** (kW)	**Verwarmingscapaciteit 60/40ºC** (kW)	**verwarmingscapaciteit 50/40ºC** (kW)
RBB 1000 P86	3750	4-7	18,21	-	-
RBB 1500 P86	5000	4-7	23,52	-	-
RBB 2000 P86	7500	4-7	36.57	-	-
RBB 2500 P86	8750	4-7	45.78	-	-
RSB 1000 P86	2910	3,5-5	15.58	-	-
RSB 1500 P86	3880	3,5-5	19.71	-	-

	water opwarmen				
Model	**nominale luchtstroom** (m³/h)	**geadviseerde installatiehoogte** (m)	**Verwarmingscapaciteit 80/60ºC** (kW)	**Verwarmingscapaciteit 60/40ºC** (kW)	**verwarmingscapaciteit 50/40ºC** (kW)
RSB 2000 P86	5820	3,5-5	31	-	-
RSB 2500 P86	6790	3,5-5	38.97	-	-
RBB 1000 P64	3750	4-7	-	15,16	-
RBB 1500 P64	5000	4-7	-	21,87	-
RBB 2000 P64	7500	4-7	-	31,13	-
RBB 2500 P64	8750	4-7	-	38,96	-
RSB 1000 P64	2910	3,5-5	-	12.44	-
RSB 1500 P64	3880	3,5-5	-	18.55	-
RSB 2000 P64	5820	3,5-5	-	25.84	-
RSB 2500 P64	6790	3,5-5	-	31.79	-
RBB 1000 P54	3750	4-7	-	-	16,48
RBB 1500 P54	5000	4-7	-	-	24,15
RBB 2000 P54	7500	4-7	-	-	35,04
RBB 2500 P54	8750	4-7	-	-	42,12
RSB 1000 P54	2910	3,5-5	-	-	14.47
RSB 1500 P54	3880	3,5-5	-	-	21.19
RSB 2000 P54	5820	3,5-5	-	-	30.77
RSB 2500 P54	6790	3,5-5	-	-	36.94

60Hz


	onverwarmd	
Model	**nominale luchtstroom** (m³/h)	**geadviseerde installatiehoogte** (m)
RBB 1000 A	4020	4-7
RBB 1500 A	5360	4-7
RBB 2000 A	8040	4-7
RBB 2500 A	9380	4-7
RSB 1000 A	3060	3,5-5
RSB 1500 A	4080	3,5-5
RSB 2000 A	6120	3,5-5
RSB 2500 A	7140	3,5-5


	elektrische verwarming		
Model	**nominale luchtstroom** (m³/h)	**elektrische warmte capaciteit 400Vx1** (kW)	**geadviseerde installatiehoogte** (m)
RBB 1000 E	4020	6/15/21	4-7
RBB 1500 E	5360	8/19/27	4-7
RBB 2000 E	8040	12/30/42	4-7
RBB 2500 E	9380	16/30/46	4-7
RSB 1000 E	3060	5/10/15	3,5-5
RSB 1500 E	4080	7,5/15/22,5	3,5-5
RSB 2000 E	6120	10/20/30	3,5-5
RSB 2500 E	7140	12/22/34	3,5-5

water opwarmen

Model	nominale luchtstroom (m³/h)	geadviseerde installatiehoogte (m)	Verwarmingscapaciteit 80/60ºC (kW)	Verwarmingscapaciteit 60/40ºC (kW)	verwarmingscapaciteit 50/40ºC (kW)
RBB 1000 P86	3750	4-7	18,21	-	-
RBB 1500 P86	5000	4-7	23,52	-	-
RBB 2000 P86	7500	4-7	36.57	-	-
RBB 2500 P86	8750	4-7	45.78	-	-
RSB 1000 P86	2910	3,5-5	15.58	-	-
RSB 1500 P86	3880	3,5-5	19.71	-	-
RSB 2000 P86	5820	3,5-5	31	-	-
RSB 2500 P86	6790	3,5-5	38.97	-	-
RBB 1000 P64	3750	4-7	-	15,16	-
RBB 1500 P64	5000	4-7	-	21,87	-
RBB 2000 P64	7500	4-7	-	31,13	-
RBB 2500 P64	8750	4-7	-	38,96	-
RSB 1000 P64	2910	3,5-5	-	12.44	-
RSB 1500 P64	3880	3,5-5	-	18.55	-
RSB 2000 P64	5820	3,5-5	-	25.84	-
RSB 2500 P64	6790	3,5-5	-	31.79	-
RBB 1000 P54	3750	4-7	-	-	16,48
RBB 1500 P54	5000	4-7	-	-	24,15
RBB 2000 P54	7500	4-7	-	-	35,04
RBB 2500 P54	8750	4-7	-	-	42,12
RSB 1000 P54	2910	3,5-5	-	-	14.47
RSB 1500 P54	3880	3,5-5	-	-	21.19
RSB 2000 P54	5820	3,5-5	-	-	30.77
RSB 2500 P54	6790	3,5-5	-	-	36.94

Afmetingen

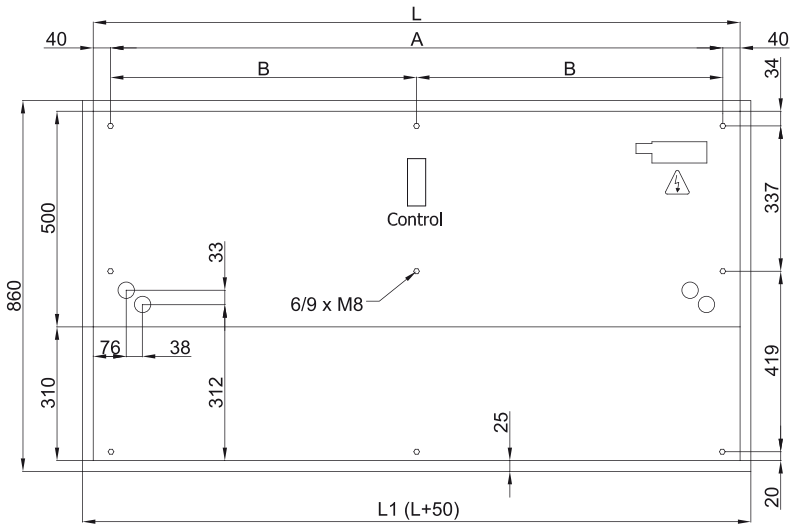

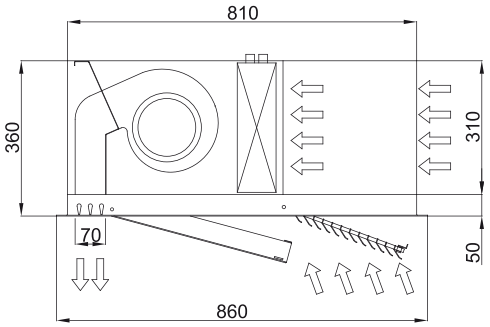

L	L1	A	B
1000	1050	920	-
1500	1550	1420	710
2000	2050	1920	960
2500	2550	2420	1210